



## Esticador DIN 1480 Forjados Galvanizados (Gancho - Olhal)

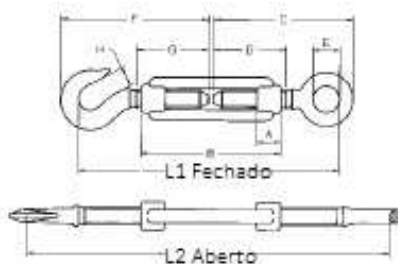

Refª	Dimensões (mm)										S.W.L. (kg)	Peso (kg)	Código
	A	B	C	D	E	F	G	H	L1	L2			
M 5	9	79	59	40	8	62	40	6	112	181	50	0,050	303.20105
M 6	12	110	74	50	10	76	50	8,5	150	234	75	0,090	303.20106
M 8	15	110	80	52	11	89	52	10	161	245	165	0,140	303.20108
M 10	18	125	97	60	14	103	62	12	188	285	235	0,280	303.20110
M 11	17,5	135	102	65	15	112	65	12,5	208	322	280	0,330	303.20111
M 12	21	125	106	67	17	121	65	16	208	305	320	0,410	303.20112
M 14	23	140	126	83	18	144	82	16	248	356	420	0,570	303.20114
M 16	27	170	160	97	23	172	105	16,5	299	433	530	0,960	303.20116
M 20	34	200	190	116	25	185	110	17,5	341	495	730	1,540	303.20120
M 22	36	220	200	120	30	216	125	23	379	551	1120	2,130	303.20122
M 24	39	255	210	125	34	225	135	23	394	594	1550	2,840	303.20124
M 27	45	255	236	150	34	250	135	29	438	632	1870	3,890	303.20127
M 30	45	255	240	150	38	250	145	29	441	635	2240	4,150	303.20130
M 33	45	255	242	150	39	250	145	29	441	636	2850	5,880	303.20133
M 36	55	295	276	160	48	284	170	30	502	723	3530	7,530	303.20136
M 38	63	330	276	165	48	288	170	30	503	750	4150	9,380	303.20138

## Esticador DIN 1480 Forjados Galvanizados (Olhal - Olhal)

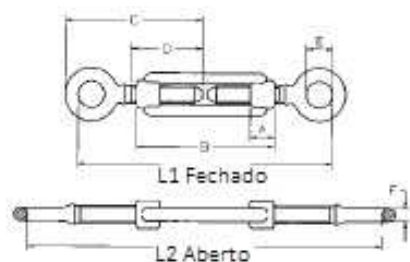

Refª	Dimensões (mm)									S.W.L. (kg)	Peso (kg)	Código
	A	B	C	D	E	F	L1	L2				
M 6	12	110	74	50	10	4	150	234	225	0,08	303.20306	
M 8	15	110	80	52	11	5	156	240	410	0,14	303.20308	
M 10	18	125	97	60	14	6,5	186	282	650	0,25	303.20310	
M 12	21	125	106	67	17	8	196	293	930	0,37	303.20312	
M 16	27	170	160	97	23	13	294	428	1770	0,95	303.20316	
M 20	34	200	190	116	25	14	352	506	2700	1,48	303.20320	
M 22	36	220	200	120	30	16	368	540	3300	2,06	303.20322	